

TEMTEC's fiberglass reinforced polyester (FRP) water filter tank, filling media filters for use in water treatment system; softener and clarify water application for industrial, municipal, and institutional. The product have strong strength and unique design lines.


Shell layer : Fiber glass

Inner shell : seamless PE / Base vessels

Operating Conditions

Max. operating pressure : 10.5 bar (150 PSI)

Max. operating temperature : 49 °C (120 °F)

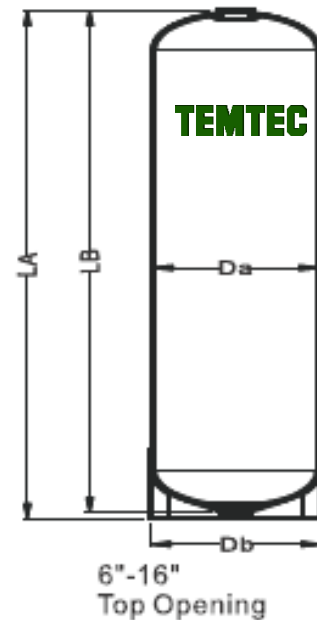

Model	Vessel Size		Volume liter	DIA (Da) mm	Overall (LA) mm	Height (LB) mm	Based (LC) mm	Top/Bottom open inch	Suggested Flow m ³ /hrs
	inch	mm							
TT844 / 2.5T	8x44	205x1125	31.5	205	1125	1118	-	2.5 NPSM	0.2-0.5
TT1054 / 2.5T	10x54	257x1388	62.0	257	1388	1370	-	2.5 NPSM	0.6-1.5
TT1252 / 2.5T	12x52	307x1335	85.0	307	1335	1328	-	2.5 NPSM	1.6-2.2