


- Processing follow up under standard NSF/ANSI 44
- Fatigue test : 10,000 cycles
- Burst test : 4 times of operating pressure
- Operating pressure : 10.5 bar (150 PSI)
- Operating temperature range : 1 -50 C (34-122 F)




### FRP Tank List

No.	Size Inches	Opening		Volume		Base	Dimensions			
		TOP	Bottom	Liter	USA Gallon		A (mm)	B (mm)	C (mm)	D (mm)
1	8*44	2.5"	/	32.0	8.5	Standard	1125	Φ216		Φ207
2	10*54	2.5"	/	62.8	16.6	Standard	1390	Φ266		Φ258
3	12*52	2.5"	/	84.5	22.3	Standard	1333	Φ318		Φ308
4	14*65	2.5"	/	145.0	38.5	Standard	1655	Φ369		Φ360
5	16*65	2.5"	/	148.0	39.0	Standard	1316	Φ420		Φ410

*All vessels are completed with PE line*

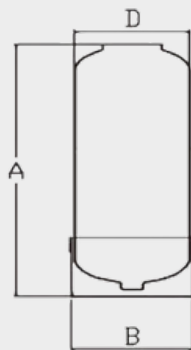

6" - 12"  
Top opening Top

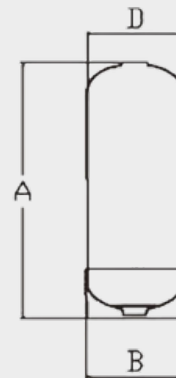

13" - 16"  
Top opening Top

