

## General Specification



- Material : SS304
- Working Pressure Max. : 150 PSI
- V – Clamp closure or with SS cup and spring assembly
- Polished or sandblast external surface

## Application

- Water Treatment
- Commercial

## Features

- Easy to replace
- Premium quality

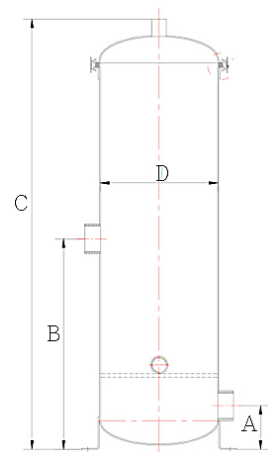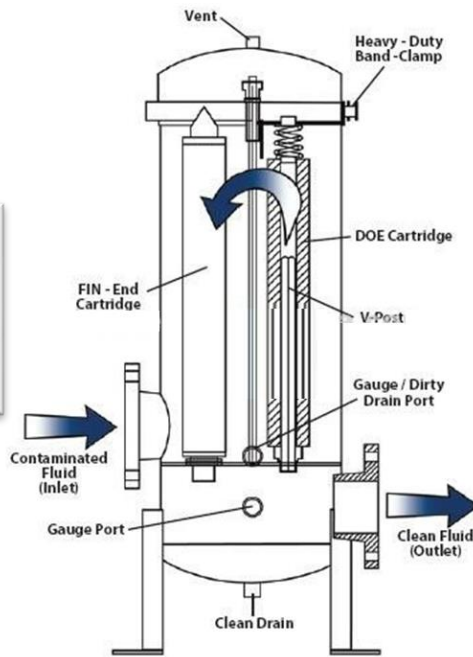

Model	A (mm)	B (mm)	C (mm)	ID	Inlet/Outlet	Drain
FCH-SS170-3x10	75	180	505	170	2"/2"	1/2"
FCH-SS170-3x20	75	180	800	170	2"/2"	1/2"
FCH-SS170-3x30	75	180	1050	170	2"/2"	1/2"
FCH-SS200-5x10	75	180	560	200	2"/2"	1/2"
FCH-SS200-5x20	75	180	810	200	2"/2"	1/2"
FCH-SS200-5x30	75	180	1060	200	2"/2"	1/2"
FCH-SS200-5x40	120	220	1360	200	2"/2"	1/2"
FCH-SS250-7x10	120	220	620	250	2"/2"	1/2"
FCH-SS250-7x20	120	220	870	250	2"/2"	1/2"
FCH-SS250-7x30	120	220	1120	250	2"/2"	1/2"
FCH-SS250-7x40	120	220	1370	250	2"/2"	1/2"
FCH-SS300-10x20	150	800	950	300	3"/3"	1/2"
FCH-SS300-10x40	150	800	1420	300	3"/3"	1/2"